



# CHANNELFLUX™

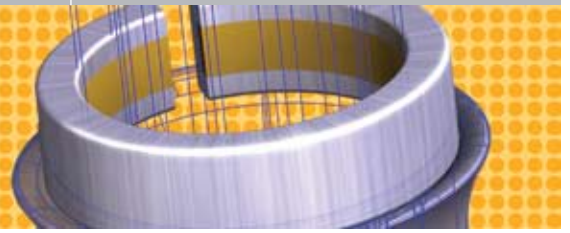

## ChannelFlux™ is a patent-pending family of brazing alloys with flux integrated into the material.

ChannelFlux™ products bring a new level of technology to the world of aluminum brazing. Developed by Bellman-Melcor, LLC the ChannelFlux™ products are being distributed by Johnson Matthey in the EU. These innovative new products can improve the engineering of components, reduce production costs, and make the repair of aluminium products viable. To find out how contact Johnson Matthey.

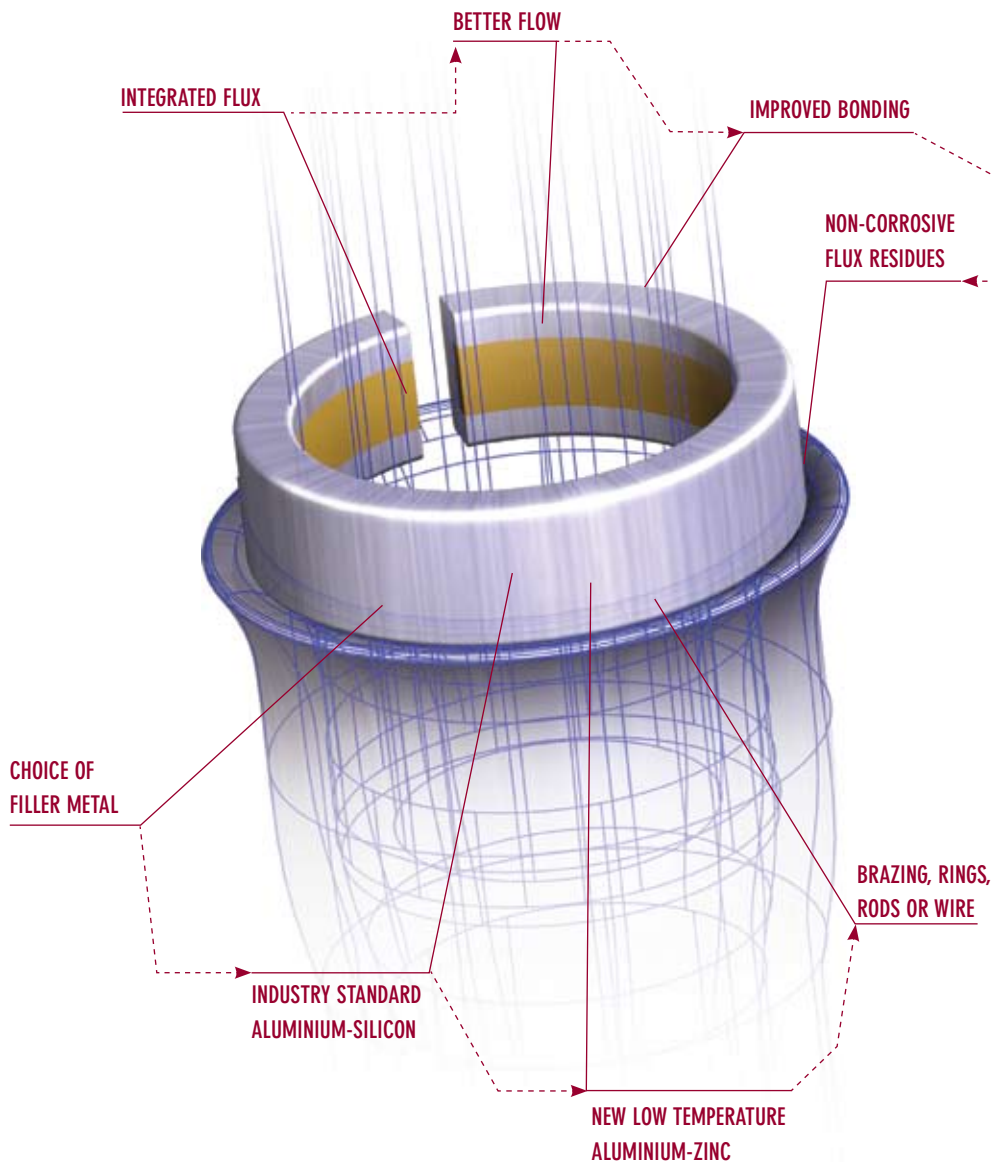

### Unique Benefits of the ChannelFlux™ Products

#### Standard and New Filler Metals

The product is available in both the industry standard aluminium filler metal and a new lower temperature alloy.

#### Active Flux

ChannelFlux™ uses a highly active cesium containing flux.

#### No Post-Braze Cleaning

The flux is non-corrosive eliminating the need for post-braze cleaning and resulting in a reduced environmental impact.

#### Reduced Labour Cost

Combining alloy and flux simplifies their application to components.

#### Reduced Waste

Consistent alloy and flux volume reduces waste of brazing materials.


#### A Choice of Product Forms

ChannelFlux™ is suitable for automatic wire-feed, application by hand using a rod or by using one of several wire preform options.

#### Process Flexibility

The product is suitable for use in flame, induction and furnace brazing processes.

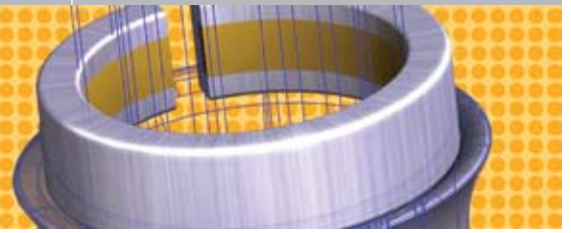

## ChannelFlux™ Alloy / Flux Products

Product	Al	Zn	Si	Melting Range	Standard	Flux System
Alu-flo™ ZA-1 ChannelFlux™	22	78	-	441-471°C	Proprietary product patent pending	Cesium-based non-corrosive

A new low temperature product combined with a leading flux to produce a breakthrough in aluminium brazing. The lower melting range provides a wider brazing process window and greater ease of use with this product.

Alu-flo™ HT ChannelFlux™	88	-	12	575-585°C	AWS A5.8 BAISI-4, 4047, EN1044: 1999 AL104	Cesium-based non-corrosive
--------------------------	----	---	----	-----------	--	----------------------------

The industry standard aluminium-silicon brazing filler metal supplied as a ChannelFlux™ product, giving a cost effective engineered alternative to solid and cored products as well as brazing pastes.

## How to use ChannelFlux™



**1** Before brazing can begin, mating parts must be clean, have the proper fit and be matched with equipment properly calibrated to braze aluminum.



**4** Approaching the braze temperature the flux system leaves the channel, either from the pre-placed ring or from the end of the rod or wire, which should be touched onto the joint interface periodically during heating to check for brazing temperature. The cesium-based flux reduces oxides preparing the surface for metallurgical bonding.



**2** The product form of the ChannelFlux™ (wire, rod or preformed ring) should be selected and designed for each application. Alloy and flux content are adjusted for optimum joint penetration. When using a ChannelFlux™ ring the dimensions and geometry can be designed for automatic loading on return bends.



**5** The heat pattern is relocated below the joint to complete the melting process. Capillary attraction distributes the molten alloy through the joint interface. It is important to judge when the filler metal has penetrated the joint and not to continue heating after this point – it is possible to 'pull' the filler metal through the joint and out of the joint area.



**3** The braze process begins with heat focused on the inserted tube. When using a ring this heating should take place above the ring. Conduction spreads the heat through the interior of the joint.



**6** The final result is a leak-free, ductile brazed joint that exceeds system performance requirements. No post-braze cleaning is required. Note: cycle time will vary from 5 to 30 seconds depending upon the heat source.

### More information on ChannelFlux™

Visit [www.jm-metaljoining.com](http://www.jm-metaljoining.com)  
Consult [www.channelflux.com](http://www.channelflux.com)

### Please note

ChannelFlux™ ZA-1 is equivalent to Alu-flo™ ZA-1 ChannelFlux™  
ChannelFlux™ 4047 is equivalent to Alu-flo™ HT ChannelFlux™

Johnson Matthey Plc cannot anticipate all conditions under which this information and our products or the products of other manufacturers in combination with our products will be used. This information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process. Such information is given in good faith, being based on the latest information available to Johnson Matthey Plc and is, to the best of Johnson Matthey Plc's knowledge and belief, accurate and reliable at the time of preparation. However, no representation, warranty or guarantee is made as to the accuracy or completeness of the information and Johnson Matthey Plc assumes no responsibility therefore and disclaims any liability for any loss, damage or injury howsoever arising (including in respect of any claim brought by any third party) incurred using this information. The product is supplied on the condition that the user accepts responsibility to satisfy himself as to the suitability and completeness of such information for his own particular use. Freedom from patent or any other proprietary rights of any third party must not be assumed. The text and images on this document are Copyright and property of Johnson Matthey. ChannelFlux™ is a trademark of Bellman-Melcor, LLC. ChannelFlux™ is a patent pending product from Bellman-Melcor, LLC. Johnson Matthey is distributing ChannelFlux™ in the EU.

### Johnson Matthey

Metal Joining York Way, Royston, Hertfordshire, SG8 5HJ, UK  
Telephone: +44 (0) 1763 253200 Fax: +44 (0) 1763 253168 email: [mj@matthey.com](mailto:mj@matthey.com)  
[www.jm-metaljoining.com](http://www.jm-metaljoining.com)



Johnson Matthey  
Metal Joining